


Date	Group	No.	Page
1.97	082	51	1(1)

Four Pin Breakout Harness J-42473

VE D7, VE D12

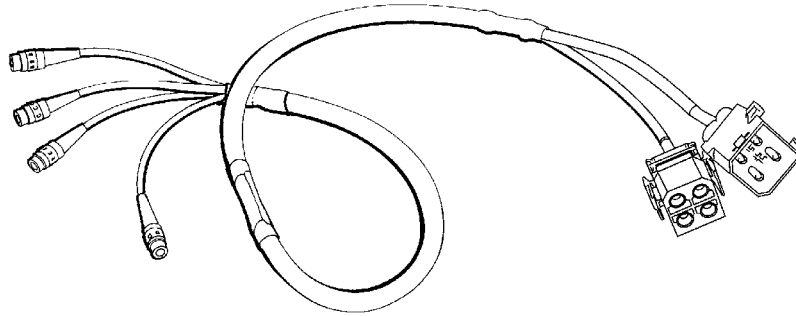

W0001422

Four Pin Breakout Harness

The above breakout harness P/N J-42473 is required when taking voltage and continuity readings of the sensors and solenoids on the VE D7 and VE D12 Engines. NOTE: the J-42473 has four active pins in the connectors. It can also be used on four pin connectors which have only three active pins.

The boost and oil pressure sensors on Volvo engines use the four pin moisture-proof connectors. NOTE: Only three pins are active on these sensors.